



ISECO

OUR DISTRIBUTOR RANGE

**An exclusive offer reserved to our
network of partners.**

A dedicated catalog of products
designed and manufactured by
ELECTRO CALORIQUE Groupe

ISECO – Our ranges



Trays solutions



Capacity 16, 20, 24 and 30 trays

Available in monobloc and split version

GN1/1 trays



Capacity 16, 20, 24, 28 and 30 trays

Available in monobloc and split version

GN1/1 trays



Capacity 16, 20 and 24 levels

Monobloc version only

GN1/1 trays

Designed for cook-serve configurations
Single tray system for service



Performance

Thermocontact power in a compact trolley



Customizable

Easily adaptable to your needs

CARELIS 2

CARELIS 2 – Single

Capacity	16	20	24	30
Length x width	750 x 985 mm			
Work surface height	1 215 mm	1 321 mm	1 487 mm	1 736 mm
Pitch	83 mm			
Useful space cold zone	77 mm			
Power Without « Boost before Serve » option	1,6kW	2,0kW	2,5kW	2,9kW
Power With « Boost before Serve » option	1,8kW	2,2kW	2,7kW	3,3kW

CARELIS 2 – Fresh

Capacity	16	20	24	30
Length x width	750 x 985 mm			
Work surface height	1 215 mm	1 321 mm	1 487 mm	1 736 mm
Pitch	83 mm			
Useful space cold zone	77 mm			
Power Without « Boost before Serve » option	2,5kW	2,9kW	3,4kW	3,8kW
Power With « Boost before Serve » option	2,7kW	3,2kW	3,6kW	4,3kW



Designed for cook-chill / cook-serve /
cook-freeze configurations
Single tray system for service



Performance

Thermocontact power in a
compact trolley



Customizable

Easily adaptable to your needs

VITALIS 2

VITALIS 2 – 83*

Capacity	16	20	24	28	30
Length x width	750 x 985 mm				
Work surface height	1 215 mm	1 321 mm	1 487 mm	1 673 mm	1 736 mm
Useful space cold zone	77 mm				
Electrical power	3,6kW	4,5kW	5,4kW	6,2kW	6,7kW

VITALIS 2 – 98*

Capacity	16	20	24	28	30
Length x width	750 x 985 mm				
Work surface height	1 321 mm	1 487 mm	1 673 mm	1 736 mm	
Useful space cold zone	92 mm				
Electrical power	3,6kW	4,5kW	5,4kW	6,2kW	6,7kW

*Single and Carbo versions



Transport and service – Cook-
chill / cook-serve / cook-freeze
configurations



Customizable

Easily adaptable to your needs



Performance

2 separate compartments to
prevent hot and cold from mixing

45 minutes of hot autonomy after
unplugging

TRANSTRONIC EVO

TRANSTRONIC Evo2 – Eutectic plates

Capacity	16	20	24
Length x width	750 x 1335 mm		
Work surface height	1 268 mm	1 388 mm	1 588 mm
Usable space between shelves	70 mm		
Number of eutectic plates	1		2
Electrical power	2,3kW	2,7kW	3,2kW

TRANSTRONIC Evo2 – Fresh

Capacity	16	20	24
Length x width	750 x 1335 mm		
Work surface height	1 268 mm	1 388 mm	1 588 mm
Usable space between shelves	70 mm		
Electrical power	3,1kW	3,5kW	4,0kW



Bulk distribution solutions



Capacity 7 or 8 levels

Monobloc version only

Accepts GN1/1, GN1/2 and GN 1/3 containers and trays



Capacity 6 or 12 levels

Monobloc version only

Accepts GN1/1, GN1/2 and GN1/3 bins and trays

Cook-chill / Cook-serve / Cook-freeze transport and service meals in the dining room



Inertia

45-minute holding time with trolley unplugged



Programmable

Programmable 4 temperatures per plate.

Perfectly adapts temperature to your needs and meals.

SERELIS

SERELIS 1 COMPARTMENT

Models	SERELIS 7 Isolé	SERELIS 8 Isolé	SERELIS 7 Fresh	SERELIS 8 Fresh
Length x width	680 x 1 050 mm			
Work surface height	1 015 mm			
Number of levels	7	8	7 ●	8 ●
Usable space	74 mm	62 mm	74 mm	62 mm
Electrical power	5,3kW	6,1kW	6,5kW	7,2kW



SERELIS 2 COMPARTMENTS

Modèles	SERELIS 7.2 Isolé	SERELIS 8.2 Isolé	SERELIS 7.2.1 Fresh	SERELIS 8.2.1 Fresh	SERELIS 7.2 Fresh	SERELIS 8.2 Fresh
Length x width	680 x 1460 mm					
Work surface height	1 015 mm					
Number of levels cold zone	15	15	15 ●	15 ●	15 ●	15 ●
Usable space cold zone	42,5 mm					
Number of levels hot zone	7	8	7	8	7 ●	8 ●
Usable space hot zone	74 mm	62 mm	74 mm	62 mm	74 mm	62 mm
Electrical power	5,3kW	6,1kW	6,5kW	7,2kW	6,5kW	7,2kW



Possibility of refrigerated compartment



Possibility of refrigerated compartment

SERELIS COMPACT

Models	SERELIS compact 7	SERELIS compact 8
Length x width	680 x 910 mm	
Work surface height	1 015 mm	
Number of levels	7	8
Usable space	74 mm	62 mm
Electrical power	3,6kW	4,1kW



Transport and temperature
maintenance exclusively for
cook-serve in bulk dishes
and/or plates



Simple

Easy to use: just plug it in.



Compact

A light, easy-to-handle trolley

QUIETIS



QUIETIS 20 MIXTE

Length x width 730 x 680 mm

Work surface height 1 032 mm


Number of levels
Neutral compartment 6

Pitch
Neutral compartment 42,5 mm

Number of levels
Heated compartment 8

Pitch
Heated compartment 36,5 mm

Electrical power 0,5kW

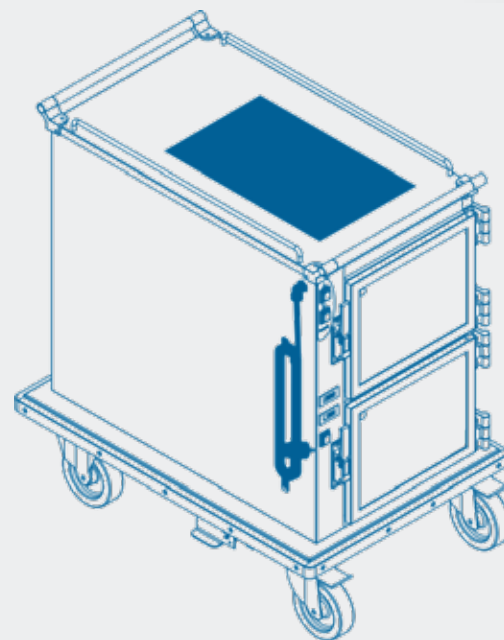

QUIETIS 20 MIXTE FRESH

Length x width 680 x 1 000 mm

Work surface height 1 032 mm


Number of levels
Refrigerated compartment 6

Pitch
Refrigerated compartment 42,5 mm

Number of levels
Heated compartment 8

Pitch
Heated compartment 36,5 mm

Electrical power 1,1kW

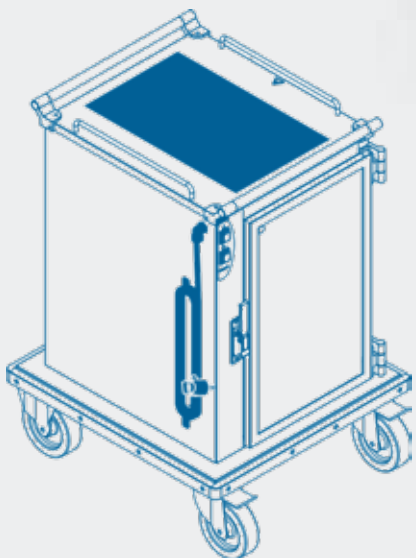

QUIETIS 40 CHAUFFANT


Length x width 730 x 680 mm

Work surface height 1 032 mm

Number of levels
Refrigerated compartment 12

Pitch
Refrigerated compartment 42,5 mm

Electrical power 1,2kW

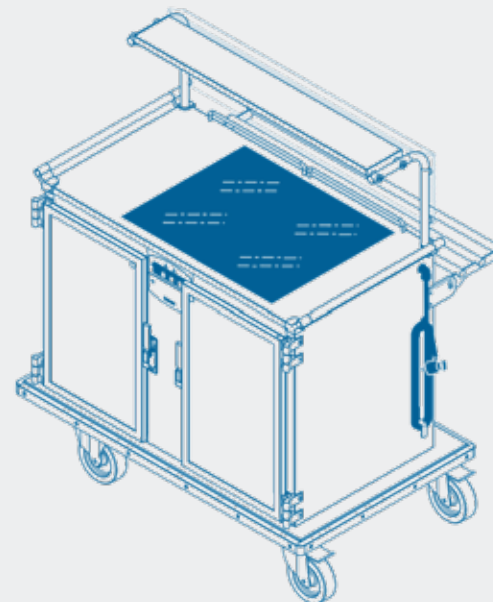

QUIETIS 40 MIXTE

Length x width 680 x 1 215 mm

Work surface height 1 025 mm


Number of levels
Neutral compartment 12

Pitch
Neutral compartment 42,5 mm

Number of levels
Heated compartment 12

Pitch
Heated compartment 42,5 mm

Electrical power 1,2kW

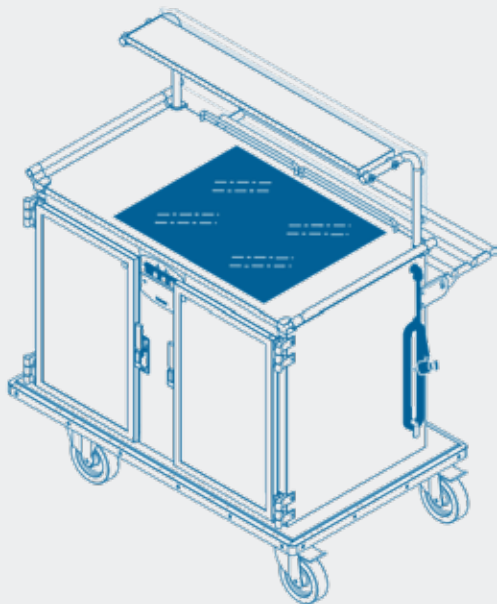

QUIETIS 40 MIXTE FRESH

Length x width 680 x 1 215 mm

Work surface height 1 025 mm


Number of levels
Refrigerated compartment 12

Pitch
Refrigerated compartment 42,5 mm

Number of levels
Heated compartment 12

Pitch
Heated compartment 42,5 mm

Electrical power 2,1kW

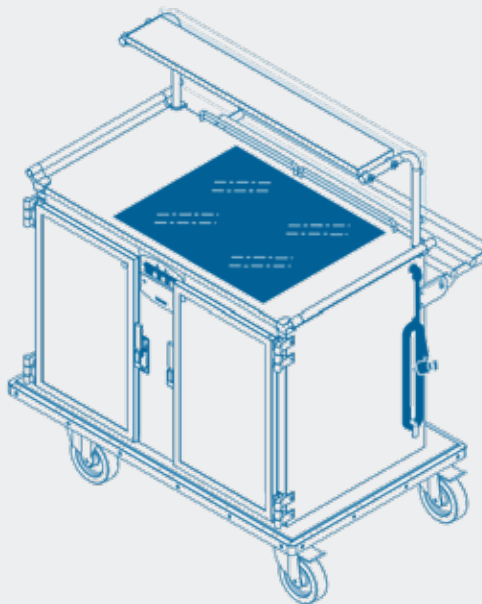

QUIETIS 80 CHAUFFANT

Length x width 680 x 1 215 mm

Work surface height 1 025 mm


Number of levels
Heated compartment 16

Pitch
Heated compartment 42,5 mm

Number of levels
Heated compartment 16

Pitch
Heated compartment 42,5 mm

Electrical power 2,4kW

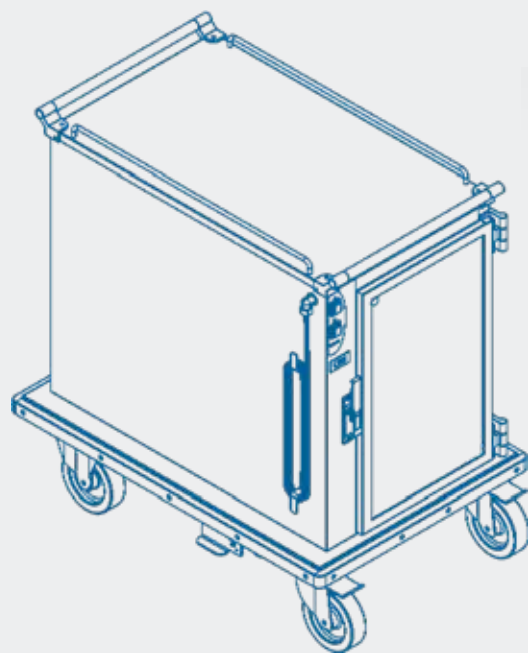

QUIETIS 40 CHAUFFANT

Length x width 680 x 1 000 mm

Work surface height 987 mm

Number of levels 12
Heated compartment

Pitch 42,5 mm
Heated compartment

Electrical power 0,9kW

Regeneration oven



Capacity 4 to 12 levels

Accepts all types of GN1/1 and
submultiple containers

Thermocontact reheating and
holding oven



Quiet

Fits neatly into any space:

- No heat emission
- No sound




Programmable

Programmable 4 temperatures
per plate.

Perfectly adapts temperature
to your needs and meals.


ENERGIS

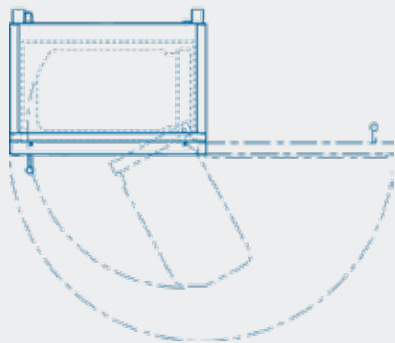

ENERGIS réversible

Models	ENERGIS réversible 4	ENERGIS réversible 6	ENERGIS réversible 8	ENERGIS réversible 12
Length x width	700 x 466 mm			
Height	714 mm	902 mm	1 090 mm	1 372 mm
Number of levels	4	6	8	12
Capacity per level	2 x GN ½ or 3 x GN 1/3			
Electrical power	3,1kW	4,6kW	6,1kW	9,1kW





ENERGIS compact

Models	ENERGIS compact 4	ENERGIS compact 6	ENERGIS compact 8	ENERGIS compact 12
Length x width	560 x 466 mm			
Height	714 mm	902 mm	1 090 mm	1 372 mm
Number of levels	4	6	8	12
Capacity per level	1 x GN ½ or 2 x GN 1/3			
Electrical power	2,2kW	3,2kW	4,2kW	6,2kW



Breakfast range



Capacity 14 to 48 GN1/2 trays

8 versions 4 models

Numerous accessories

Work surface under 1 meter

Breakfast and snack service in
325x325, GN1/1, GN1/2 trays
or any combination of trays,
grids, stainless steel or
copolyester trays



Customizable

Customization possible

Pull-out drawers as standard




Compact

A light, easy-to-handle cart


SERVIS EVO

SERVIS Evo 1 column

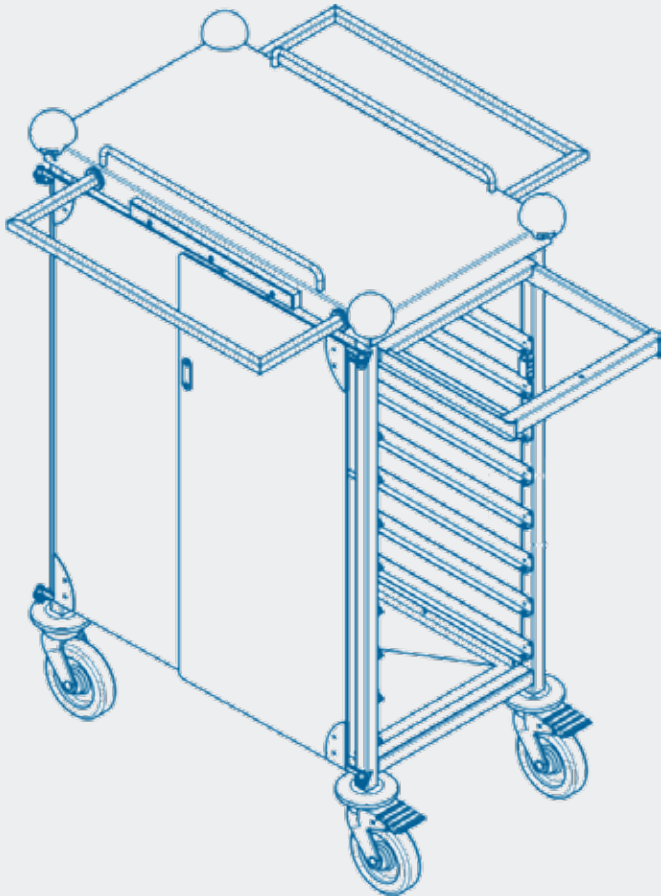


Models	SERVIS Evo 14	SERVIS Evo 16
Length x width	454 x 750 mm	
Work surface height	1 050 mm	
Number of levels	7	8
Capacity of runners	7 GN 1/1 trays or 14 GN 1/2 trays / 325 x 325	8 GN 1/1 trays or 16 GN 1/2 trays / 325 x 325
Pitch of runners	95 mm	81 mm
Capacity of each crossingsliding frame	1 GN 1/2 or 2 GN 1/4	
Capacity of each side telescopic extension	2 GN 1/4	

SERVIS Evo 2 columns

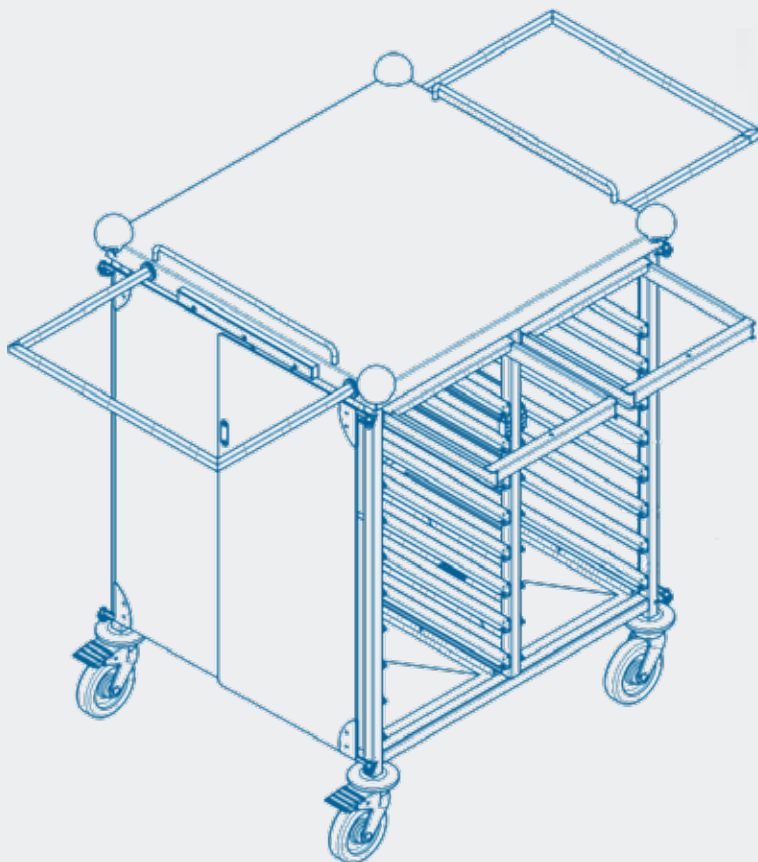

Models	SERVIS Evo 28	SERVIS Evo 32
Length x width	807 x 750 mm	
Work surface height	1 050 mm	
Number of levels	2 x 7	2 x 8
Capacity of runners	14 GN 1/1 trays or 28 GN 1/2 trays / 325 x 325	16 GN 1/1 trays or 32 GN 1/2 trays / 325 x 325
Pitch of runners	95 mm	81 mm
Capacity of each crossingsliding frame	1 GN 1/2 or 2 GN 1/4	
Capacity of each side telescopic extension	1 GN 1/1 or 2 GN 1/2 or 3 GN 1/3	

SERVIS Evo 2 columns compact

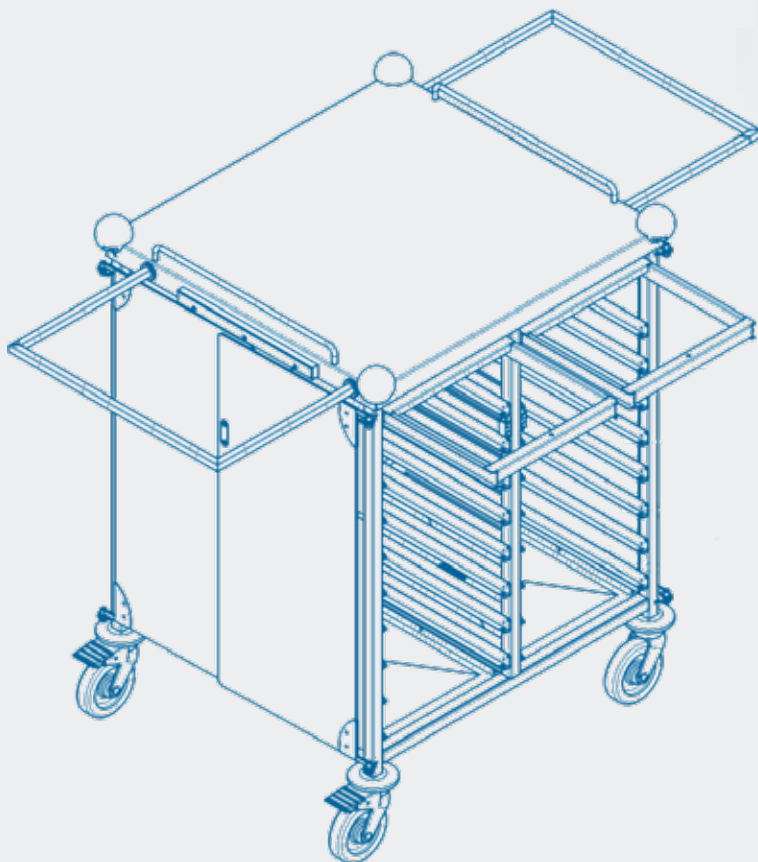

Models

SERVIS Evo 28

SERVIS Evo 32

Length x width

807 x 630 mm

Work surface height

1 050 mm

Number of levels

2 x 7

2 x 8

Capacity of runners

14 GN 1/1 trays
or 28 GN 1/2 trays / 325 x 325

16 GN 1/1 trays
or 32 GN 1/2 trays / 325 x 325

Pitch of runners

95 mm

81 mm

Capacity of each crossingsliding frame


1 GN 1/2 or 2 GN 1/4 | 1 GN 1/3 or 2 GN 1/6

Capacity of each side telescopic extension

1 GN 2/3 or 2 GN 1/3



SERVIS Evo 3 columns

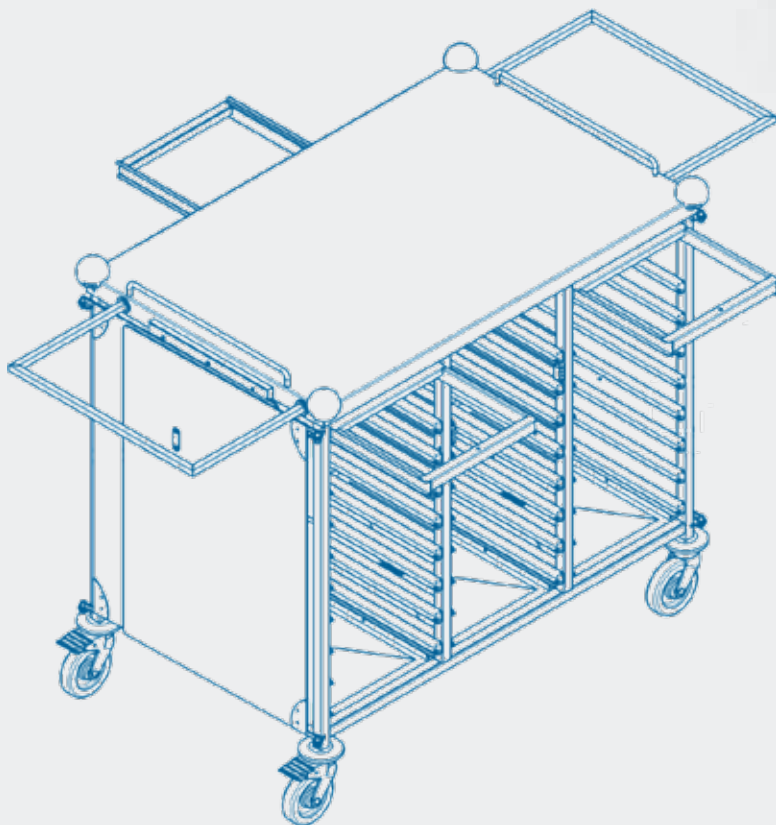

Models	SERVIS Evo 42	SERVIS Evo 48
Length x width	807 x 750 mm	
Work surface height	1 050 mm	
Number of levels	3 x 7	3 x 8
Capacity of runners	21 GN 1/1 trays or 42 GN 1/2 trays / 325 x 325	24 GN 1/1 trays or 48 GN 1/2 trays / 325 x 325
Pitch of runners	95 mm	81 mm
Capacity of each crossingsliding frame	1 GN 1/2 or 2 GN 1/4	
Capacity of each side telescopic extension	1 GN 1/1 or 2 GN 1/2 or 3 GN 1/3	

Logistics range



Capacity 9 to 32 trays

1 to 3-column trolley

Accepts GN1/1, GN1/2 and GN1/3
trays, bins and grids



Capacity 9 to 16 levels

Monobloc version only

Accepts GN1/1, GN1/2 and GN1/3
bins



Capacity 16 to 30 levels

Available in monobloc and split
version

Accepts GN1/1 and GN2/1 trays
and grids

Trolley for transporting meals in various containers: trays, baskets, grids, etc.



Sturdy

A trolley designed and dedicated to logistics (reinforced chassis, IPX5)

5-year warranty




Customizable

Different sizes

Possibility of towing


NAVIS

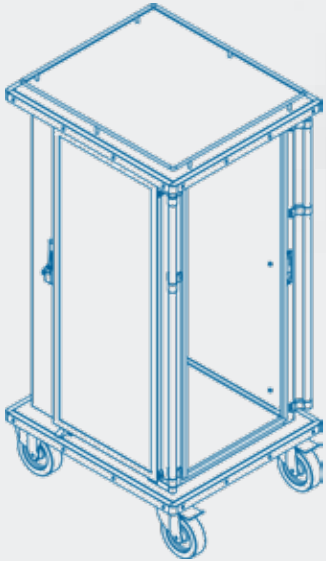

NAVIS 6/4 – 1 door

Stacked baskets

Models			
Length	690 mm		
Width	780 mm – 840 mm*		
Cavity height	830 mm 745 mm*	1 150 mm 1 065 mm*	1 410 mm 1 325 mm*

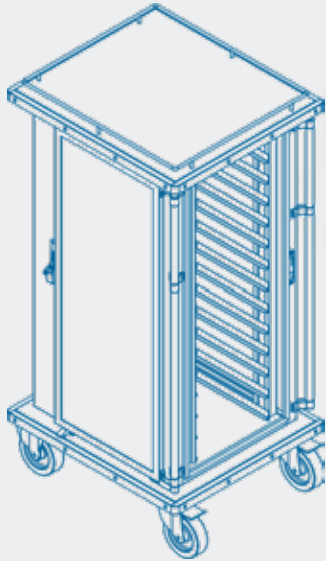

NAVIS GN1/1 – 1 door

Gastronorm containers

Models	9	9	13	16
Length	690 mm			
Width	780 mm – 840 mm*			
Pitch	85 mm	125 mm	85 mm	125 mm
Cavity height	830 mm	1150 mm	1150 mm	1410 mm




*with Carbo option

NAVIS 2 x 6/4 – 2 doors

Stacked baskets


Models		
Length	1 270 mm	
Width	810 mm	
Cavity height	830 mm	1 150 mm

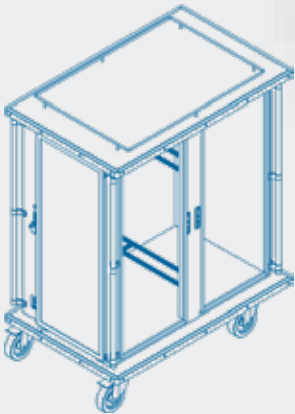


NAVIS 2 x GN1/1 – 2 doors

Gastronorm containers

Models	10	10	10	12	15	16
Length x width	1 050 x 750 mm					
Number of levels	2 x (10+1)	2 x 10	2 x 12	2 x 15	2 x 16	
Pitch	80 mm	90 mm	100 mm	100mm	90 mm	85 mm
Cavity height	868 mm	930 mm	1020 mm	1230 mm	1390 mm	1390 mm

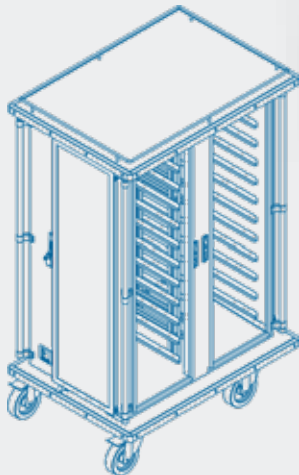

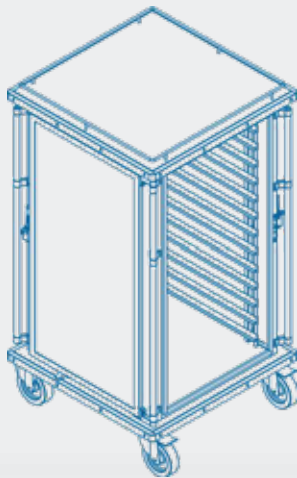


NAVIS 2 x GN 2/1 - 2 doors

Gastronorm containers

Models	7	8	9	10	10	9	10	11	12	13	14	15	16
Length x width	830 x 830 mm												
Number of levels	7	8	9	10	10	9	10	11	12	13	14	15	16
Pitch	116 mm	100	85	81	90	125	113	100	94	85	81	75	70
Cavity height	830 mm			950 mm			1 150 mm						



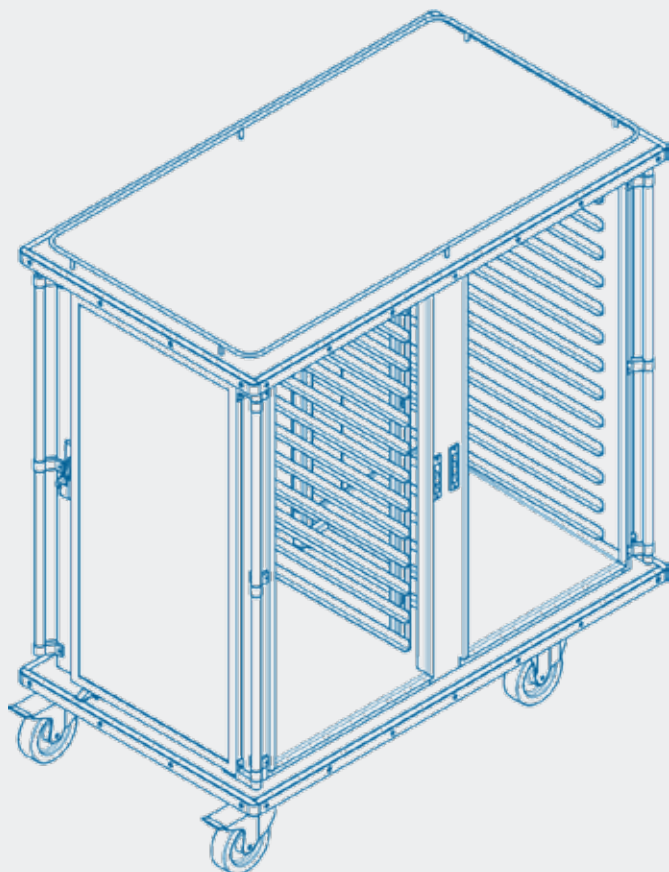

NAVIS 2 x GN 2/1 - 2 doors

Gastronorm containers

Capacity	12	13	16
Length x width	830 x 1 460 mm		
Number of levels	2 x 12	2 x 13	2 x 16
Pitch	100 mm	85 mm	
Cavity height	1 227 mm	1 127 mm	1 387 mm

Logistics tool for cook-serve
transport of GN1/1, GN1/2 and
GN1/3 containers



Sturdy

A trolley designed and dedicated to logistics (reinforced chassis, IPX5)

5-year warranty




Customizable

Different sizes

Possibility of towing


NAVIS CALDO / DUO

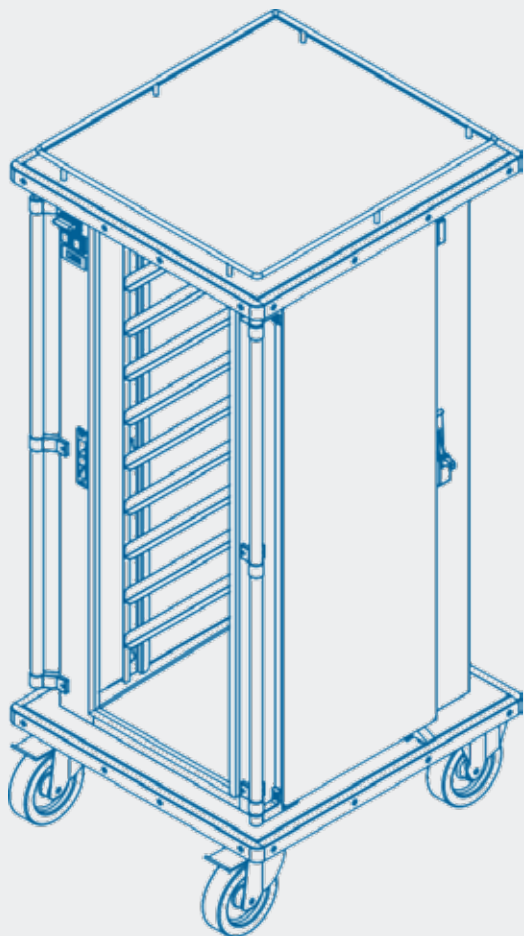

NAVIS CALDO

Models	7	10	10	12	14	17
Length x width	680 x 730 mm					
Number of levels	7	2 x 10		12	14	17
Pitch	105 mm	72 mm	105 mm	61 mm	72 mm	61 mm
Cavity height	796 mm	1116 mm		796 mm	1116 mm	
Electrical power	1,7kW	2,1kW		1,7kW	2,1kW	

NAVIS CALDO DUO

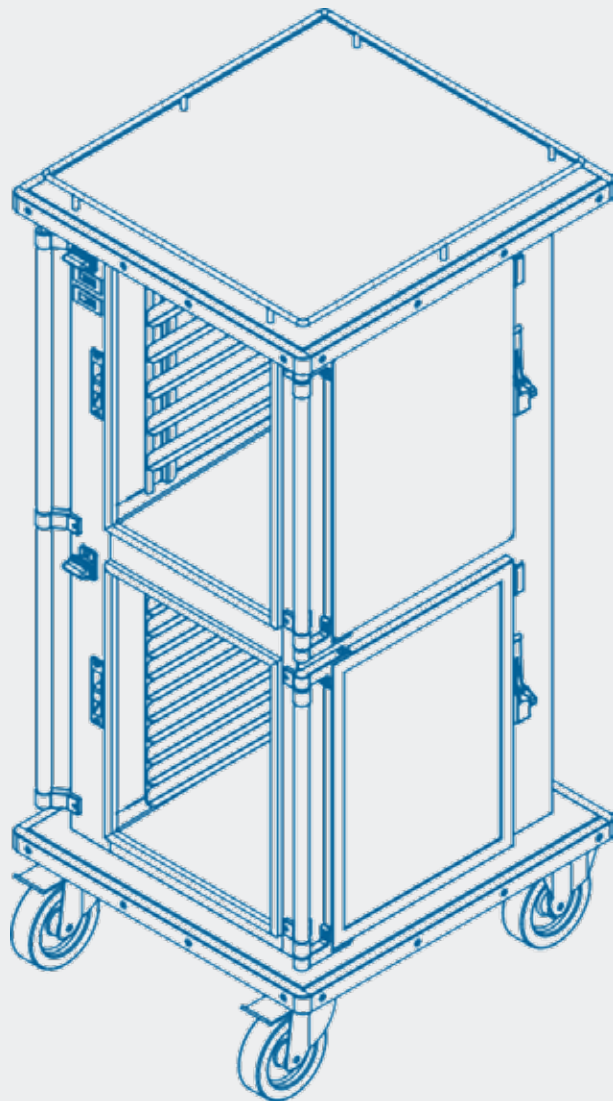

Capacity

4

6

7

Length x width

680 x 730 mm

Number of levels

Heated compartment

4

6

7

Pitch

Heated compartment

105 mm

72 mm

61 mm

Cavity height

Heated compartment

501 mm

Number of levels

Neutral compartment

10

Pitch

Neutral compartment

42,5 mm

Cavity height

Neutral compartment

501 mm




Transport of complete meals packaged on individual trays for cook-chill / cook-serve / cook-freeze



Simple


Easy to use: just plug it in.

VITALIS 2 BUS et VITALIS 2 BUS FRESH

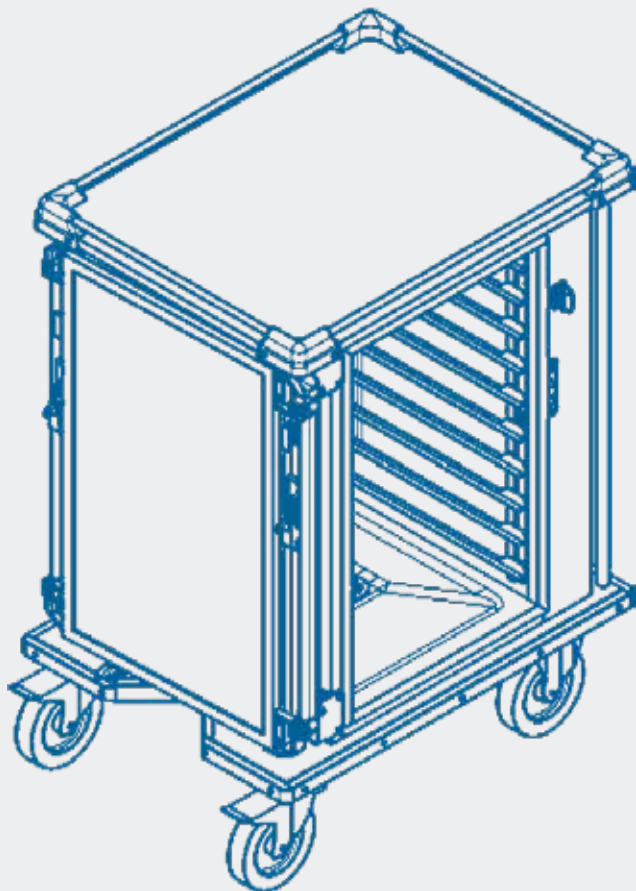

VITALIS 2 Bus - Neutre


Capacity	S	M	L	XL	XXL
Length x width	750 x 985 mm				
Work surface height	1 215 mm	1 321 mm	1 487 mm	1 673 mm	1 736 mm
Cavity height	770 mm	880 mm	1 045 mm	1 230 mm	1 295 mm
Compatible standard runners with a pitch of 83 mm	2 x 8 GN1/1	2 x 10 GN1/1	2 x 12 GN1/1	2 x 14 GN1/1	2 x 15 GN1/1
Compatible standard runners with a pitch of 98 mm	2 x 6 GN1/1	2 x 8 GN1/1	2 x 10 GN1/1	2 x 12 GN1/1	/

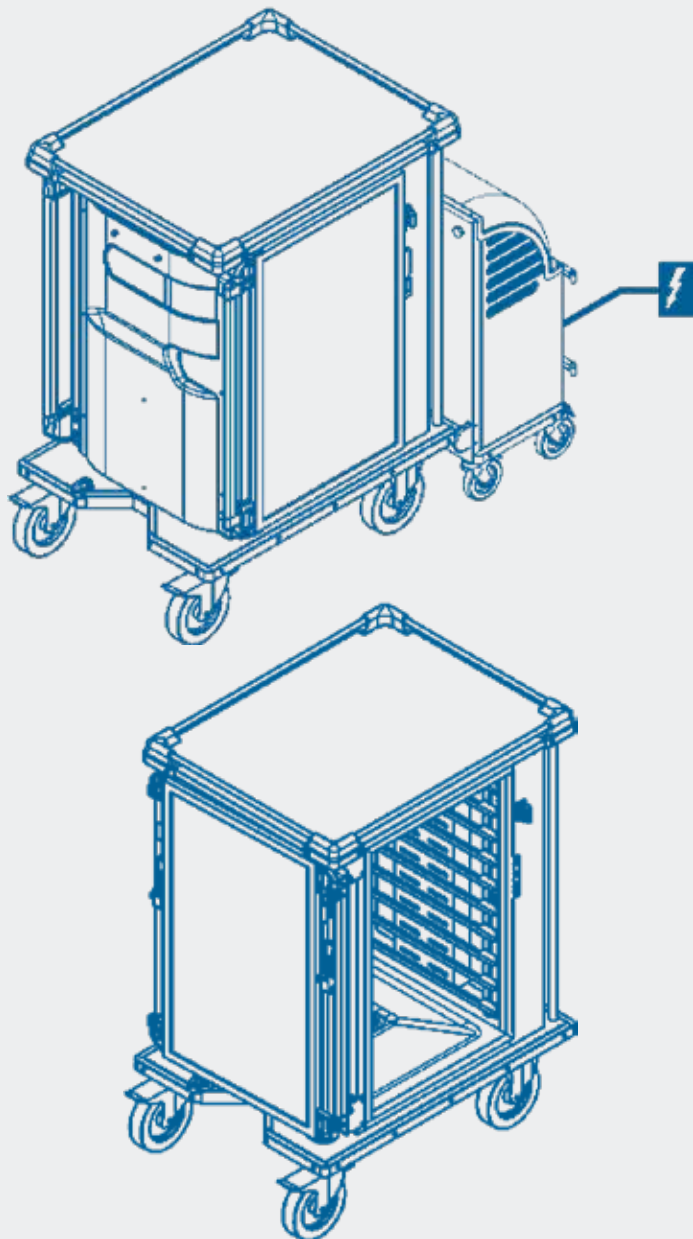

VITALIS 2 Bus - Single

Capacity	S	M	L	XL	XXL
Length x width	750 x 985 mm				
Work surface height	1 215 mm	1 321 mm	1 487 mm	1 673 mm	1 736 mm
Cavity height	770 mm	880 mm	1 045 mm	1 230 mm	1 295 mm
Compatible standard runners with a pitch of 83 mm	2 x 8 GN1/1	2 x 10 GN1/1	2 x 12 GN1/1	2 x 14 GN1/1	2 x 15 GN1/1
Compatible standard runners with a pitch of 98 mm	2 x 6 GN1/1	2 x 8 GN1/1	2 x 10 GN1/1	2 x 12 GN1/1	/



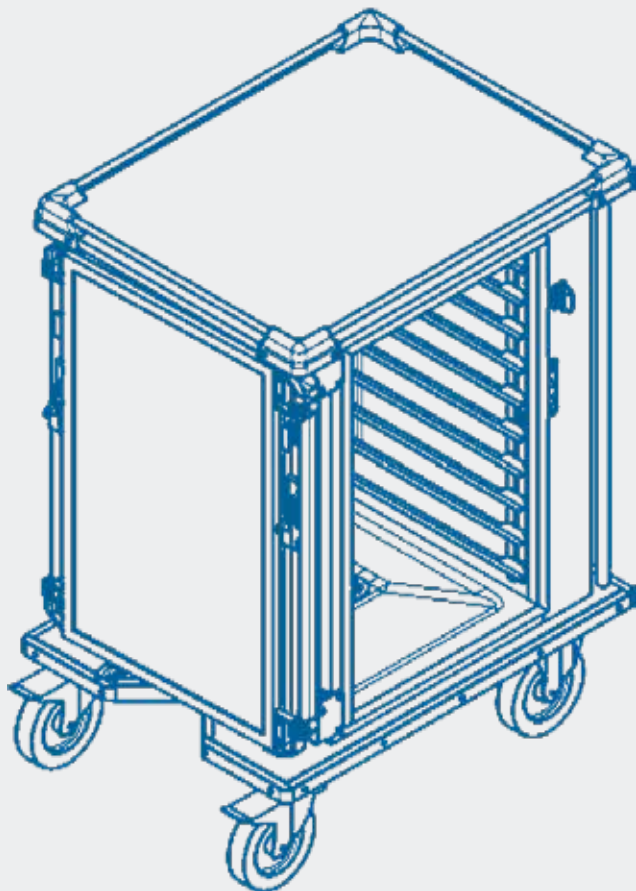

VITALIS 2 Bus - Carbo

Capacity	S	M	L	XL	XXL
Length x width	750 x 985 mm				
Work surface height	1 215 mm	1 321 mm	1 487 mm	1 673 mm	1 736 mm
Cavity height	770 mm	880 mm	1 045 mm	1 230 mm	1 295 mm
Compatible standard runners with a pitch of 83 mm	2 x 8 GN1/1	2 x 10 GN1/1	2 x 12 GN1/1	2 x 14 GN1/1	2 x 15 GN1/1
Compatible standard runners with a pitch of 98 mm	2 x 6 GN1/1	2 x 8 GN1/1	2 x 10 GN1/1	2 x 12 GN1/1	/

serve the best

